UC-700

Ice Maker

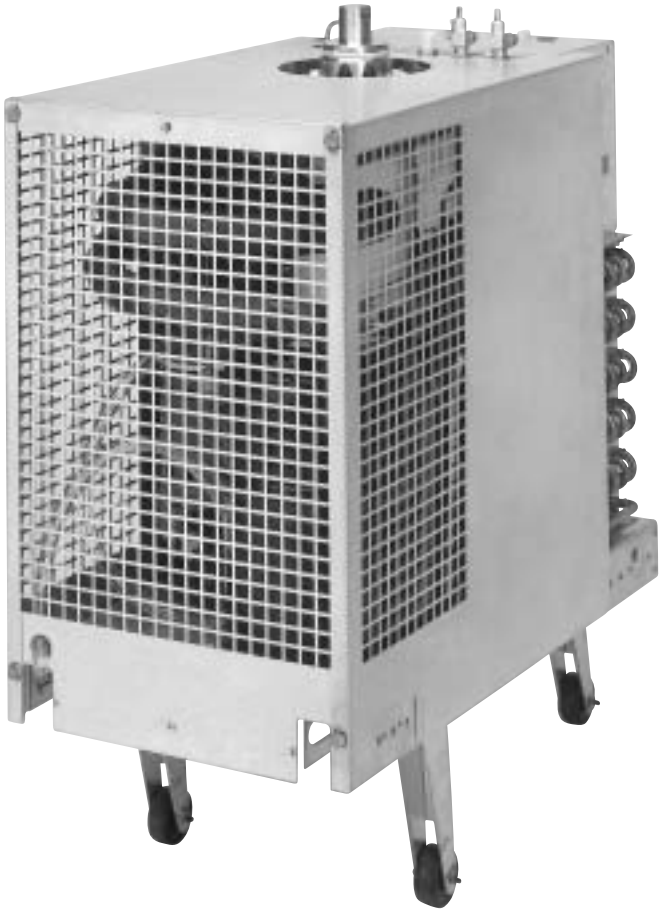

Features:

- **Compact, only 13 3/4" wide**
- **Energy efficient, 4.95 KWH / 100 lbs.**
- **CFC-free, R-404a refrigerant**
- **Ice maker uses 100% of water**
- **Quality “chewable” ice**
- **Fewer moving parts, eliminates the use of water pumps, hot gas solenoids, timers and noisy harvest cycles**
- **Low profile under counter application**
- **Four adjustable wheels for convenient service and maintenance access**

Options:

- **Air cooled or water cooled**
- **Left or right hand mounting**
- **Water inlet kit**

UC-700

Technical Specifications:

Description: Continuous compressed ice cuber

Compressor: 3/4 H.P.

Refrigerant: CFC-Free, R-404a

Voltage: 115 / 60

Minimum Circuit Amps: 20

Ice Production Capacity (60 cycle):

616 lbs. @ 70°F Air / 50°F Water
(279.41 kg @ 21.09°C Air / 10.0°C water)

Cabinet Construction: Galvanized steel

Dimensions:
Wide: 13.7" (34.80 cm)
Deep: 25.5" (64.77 cm)
High: 27" (68.58 cm)

Shipping Weight: 187 lbs. (85 kgs.)

Agency Listings:

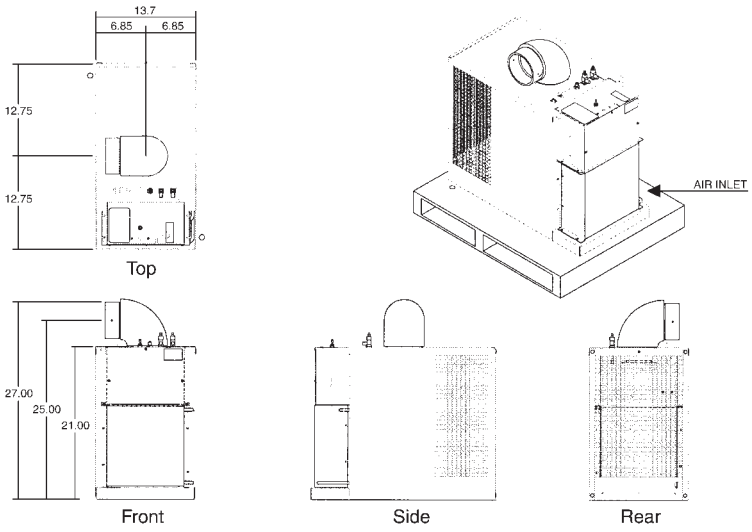

Ice making capacities

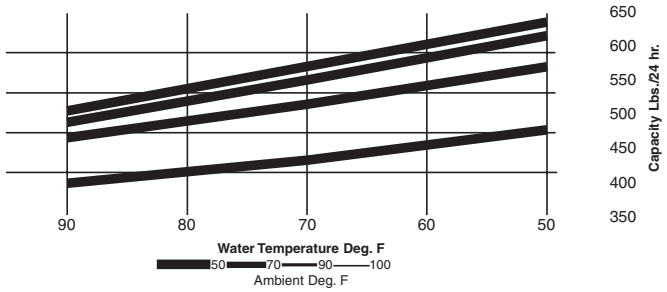

Part No.	Model No	Standard Electrical	Condenser	Production 70°/50° lbs/kgs	Shipping Weight lbs/kgs	Operating Weight lbs/kgs	Voltage Range
631600108	UC-700A	115V / 60 / 1	Air	616 lbs / 279 kgs	187 lbs / 85 kgs	176 lbs / 81 kgs	110-126V
631600109	UC-700W	115V / 60 / 1	Water	616 lbs / 279 kgs	187 lbs / 85 kgs	176 lbs / 81 kgs	110-126V

Note: Part numbers 631600108 and 631600109 are for the Profile 150 and 300 undercounter ice drink units.
For Intraflex Plus 150 units you must order part number 631600112 UCR700R air cooled rear discharge icemaker.
Please note for Profile 150 and 300 and Intraflex Plus the UC700 icemaker is installed on the opposite side of the ice dispense tower.

© 2004 IMI Cornelius

For more information or to place an order, contact your sales representative or authorized distributor.

www.cornelius.com

In the US:
Phone: 1-800-238-3600
Fax: 1-800-535-4235
Outside the US:
Phone: 1-763-421-6120
Fax: 1-763-422-3297